


Junttan PMX22  
Driven Rig  
Information Sheet



TECHNICAL DATA		
<b>Specification</b>		
Hammer Type	HHK4/5A	
Hammer Weight	kg	7.700/8.900KG
Hammer Stroke	mm	Variable 0-1200
<b>Working Heights</b>		
Maximum Leader	mm	25910
Minimum Leader	mm	21920
Maximum Pile Diameter	mm	
Maximum Pile Length	m	18 / 21
<b>Weights and Dimensions</b>		
<b>Transport</b>		
Transport width	mm	3280
Transport height	mm	3660
Transport length	mm	20270
Transport weight 4&5 t Hammer	ton	62.800 – 64.000
<b>Operating</b>		
Operating width	mm	4700
Operating height	mm	25910/28910
Operating weight	ton	62.800 – 64.000
<b>Overall</b>		
Overall length	mm	11950
Overall width	mm	3280-4700
Track shoe width	mm	900
Bearing pressure	See GPL WPC	

Working Conditions

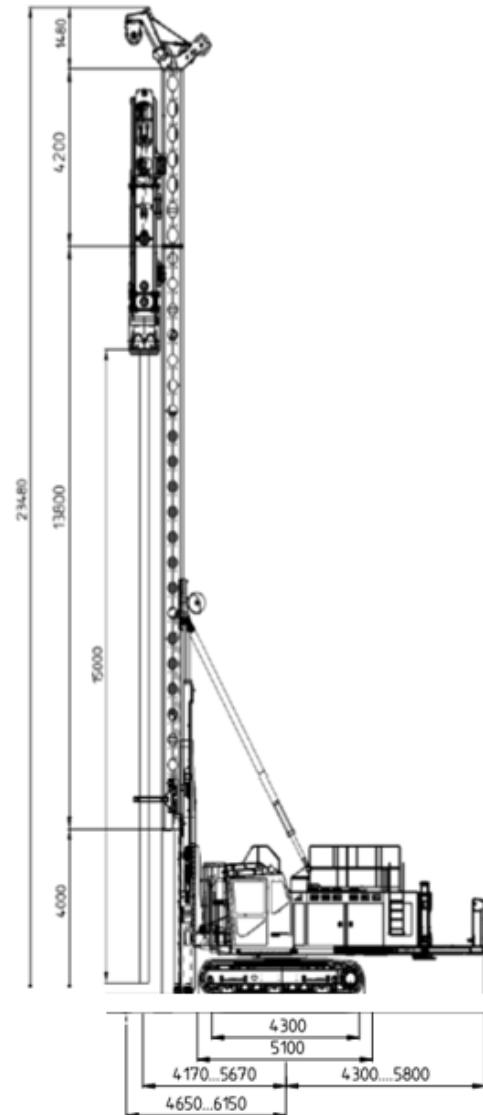

Transport Conditions

